


Universal Compression Force Sensor K-450 with Rated Force from 1 ... 1000 kN

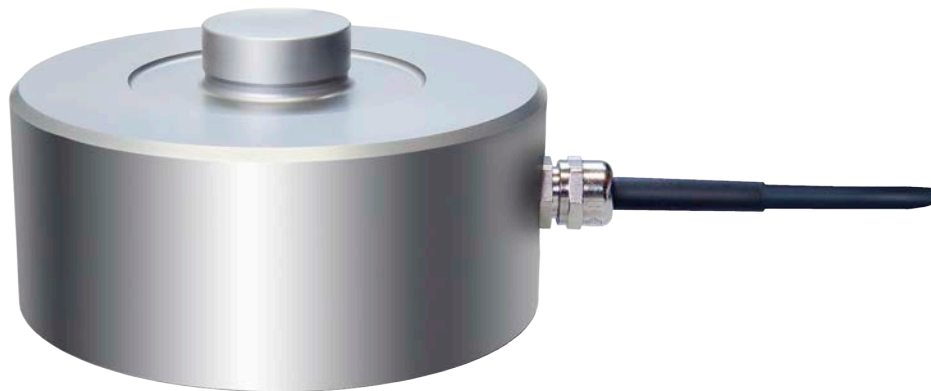

Data sheet


Performance Features

- Measurement of the static and dynamic forces
- TEDS (Transducer Electronic Data Sheet)
Standard IEEE 1451.4 (optional)
- Simple handling and assembly
- Stainless steel
- Level of protection IP67
- Long-term stability
- Special versions on request

Application

- Equipment engineering
- Fully automated machining centres
- Measuring and control devices
- Materials testing machines
- Tool engineering
- Special mechanical engineering

Dimensions in mm

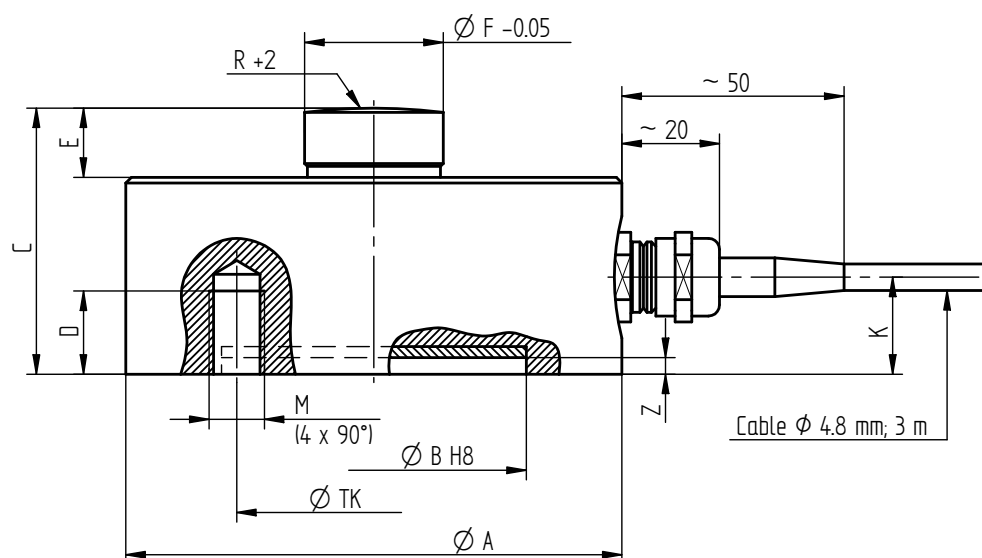

Article-No.	Rated Force [kN]	Accuracy class % F _{nom}	Dimensions [mm]											Weight [kg]
			ØA	ØB	C	D	E	ØF	K	M	R	ØTK	Z	
100126	1	0.1	49.5	34	30	8	7	13	10	M5	60	42	1.5	0.4
100128	2													
100131	5													
100133	10													
100134	20		89.5	55	48	14	12.5	25	17.5	M10	100	70	3.0	1.4
100029	50													
100031	100													
100033	200		115	68	60	16	12.5	32	23	M12	180	90	2.0	3.2
100136	500													
100139	1000		150	97	80	20	15	44	32	M16	270	125	5.0	6.9
		7.3												
100127	1	0.3	49.5	34	30	8	7	13	10	M5	60	42	1.5	0.4
100129	2													
100130	5													
100132	10													
100135	20		89.5	55	48	14	12.5	25	17.5	M10	100	70	3.0	1.4
100030	50													
100032	100													
100034	200		115	68	60	16	12.5	32	23	M12	180	90	2.0	3.2
100137	500													
100138	1000		150	97	80	20	15	44	32	M16	270	125	5.0	6.9
		7.3												

Connection Assignment

Electrical connection

Excitation (-)	Green	
Excitation (+)	Brown	
Signal (+)	Yellow	
Signal (-)	White	
Control signal or TEDS (option)	Gray	
Shielding	Shield	

Technical Data acc. to VDI/VDE/DKD 2638

Compression Force Sensor K-450

Rated force F_{nom}	kN	1 ... 1000	
Accuracy class	% F _{nom}	0.1	0.3
Rel. repeatability error in unchanged mounting position b_{rg}	% F _{nom}	0.03	0.05
Relative creep	% F _{nom} /30 min	<±0.06	<±0.08
Rated characteristic value C_{nom}	mV/V	2.00	
Relative error of characteristic value d_C	% F _{nom}	±0.1	±0.3 %
Input/output resistance R_e/R_a	Ω	350	
Insulation resistance R_{is}	Ω	>2*10 ⁹	
Rated range of excitation voltage B_{U, nom}	V	2 ... 12	
Electrical connection		Cable, PVC, 3 m with free strands	
Reference temperature T_{ref}	°C	23	
Rated temperature range B_{T, nom}	°C	-10 ... 70	
Operating temperature range B_{T, G}	°C	-30 ... 80	
Storage temperature range B_{T, S}	°C	-50 ... 95	
Temperature effect on zero signal TK₀	% F _{nom} /10 K	0.05	0.06
Temperature effect on characteristic value TK_C	% F _{nom} /10 K	0.05	0.07
Maximum operating force F_G	% F _{nom}	130	
Force limit F_L	% F _{nom}	150	
Breaking force F_B	% F _{nom}	>300	
Permissible oscillation stress F_{rb}	% F _{nom}	70	
Rated displacement S_{nom}	mm	<0.15	
Material		Stainless steel	
Level of protection		IP67	

Options


Article-No.	Description	
100218	Control signal	100 % F _{nom}
100739	Control signal	80 % M _{nom}
106154	Control signal	50 % M _{nom}
113134	TEDS-standard IEEE 1451.4	
42828	Extended temperature range	-30 °C ... 100 °C
42829	Extended temperature range	-30 °C ... 120 °C
42830	Extended temperature range	-40 °C ... 150 °C
103954	Calibration in kg or t	
107592	6-wire connection	

Calibrations

Article-No.	Description	
400628	Linearity diagram in accordance to factory standard	25 % steps
400170	Linearity diagram in accordance to factory standard	10 % steps
400960	Proprietary calibration acc. to DIN EN ISO 376 and DAkKS-DKD-R 3-3	3 steps
400652	Proprietary calibration acc. to DIN EN ISO 376 and DAkKS-DKD-R 3-3	5 steps
400640	Proprietary calibration acc. to DIN EN ISO 376 and DAkKS-DKD-R 3-3	8 steps
	DAkKS-Calibration/ Standard on request	

Accessories

Dimensions of Thrust Piece and Mounting Flange EF42 in mm

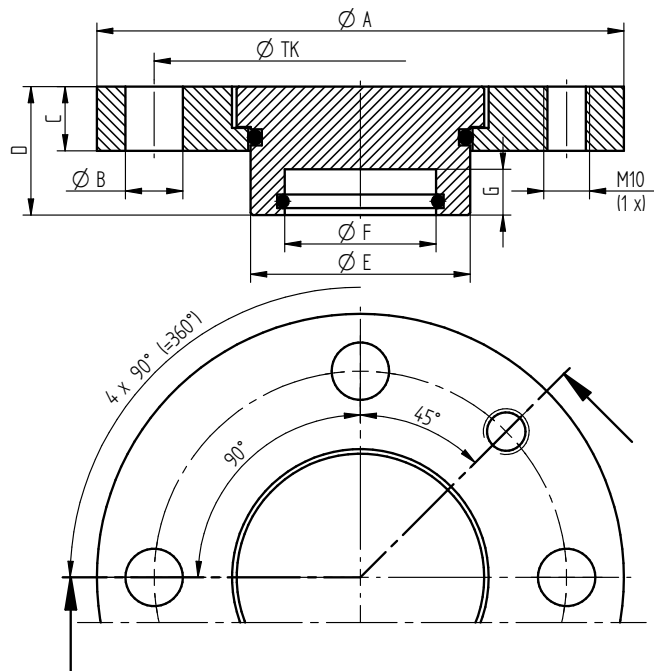

Article-No.	Rated Force [kN]	Dimensions [mm]								Weight [kg]
		ØA	ØB	C	D	ØE	FØ	G	ØTK	
42770	1/2/5/10	89	8.5	12	21	37.9	13.6	6	70	0.61
42771	20/50	89	8.5	12	21	37.9	25.7	10	70	0.58
40755	100/200	115	12.5	14	28	47.9	33	10	90	1.18
42772	500/1000	149	16.5	18	50	81.9	46	12	120	3.44

Please specify requested Rated force at order!

Cable and input connector

Article-No.	Description
10323	Cable connector KS6 (6-pin series 581) incl. sensor mounting
10320	Cable connector KSSH15 (15-pin) incl. sensor mounting
43418	Input connector ZA9612FS (ALMEMO) incl. sensor mounting and connector calibration
49205	Input connector ZKD712FS (ALMEMO 202) incl. sensor mounting and connector calibration

Amplifiers

Examples of suitable amplifiers for the universal compression force sensor K-450:

LCV	GM 78	GM 40	GM 80	SI

Further suitable amplifiers you can find on our homepage under www.lorenz-messtechnik.de